

CONSEW Since 1898


CONSOLIDATED SEWING MACHINE CORP.
INDUSTRIAL SEWING & CUTTING EQUIPMENT
web: www.consew.com

**THE QUALITY GOES IN
BEFORE THE NAME GOES ON**

June, 2023

©2023 Consew USA -0623


**PREMIER[®]
Machines & Stands**



**PREMIER[®]
By
CONSEW**

PREMIER[®] by CONSEW Since 1898

P1206RB-1 Drop Feed, Needle Feed, Walking Foot, Lockstitch Machine Side Load Hook & Bobbin

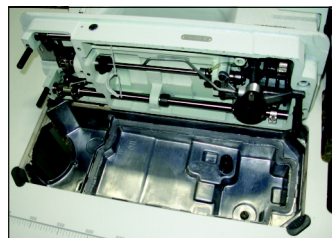

Oil Pump System with Pump, Oil Pan and Adjustable Oil Flow

- Oil Pump System with Pump, Oil Pan and Adjustable Oil Flow
- Adjustable Oil Gauge
- Reverse
- Large Horizontal Axis Hook and Side-Loaded Bobbin
- Adjustable Upper Thread Tension
- Locking Stitch Regulator

Speed, Max. 3000* spm
Presser Foot Lift: By Hand 5/16" (8 mm)
By Knee 5/8" (16 mm)
Needle Bar Stroke: 1-29/64" (37 mm)
Stitch Length, Max: 3.6 s.p.i. (7 mm)

2206RB-14-7-DD


DIRECT DRIVE MACHINE with •Triple Feed: Drop Feed, Needle Feed, Alternating (walking) Presser Feet •Semi-Automatic Lubrication System •Reverse

- **FULL AUTOMATIC FUNCTIONS** with Display
- Manual & Automatic Reverse with Knuckle Switch
- Large Bobbin And Horizontal Axis Hook (side load)
- Role-In, tucks the top thread under fabric when it starts
- Walking Foot
- **Side Load Hook and Bobbin**
- 3 s.p.i. (8mm) Stitch Length
- 110V / 220V
- Electric Footlift, Reverse and Trim - (No air needed!)

**FULL
AUTO
FUNCTION**

**LARGE
BOBBIN** **DIRECT
DRIVE**

Large Workspace
14" Horizontal (355 mm)
5.9" Vertical (150 mm)

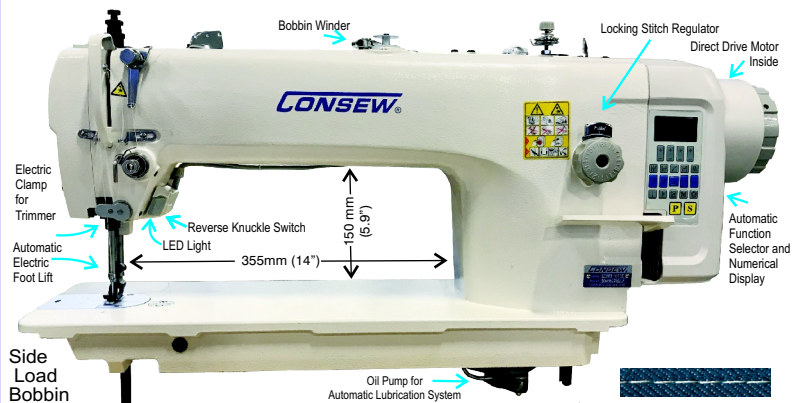


P1541S-CC Drop Feed, Needle Feed, Walking Foot Lockstitch Machine

- Automatic Lubrication System
- Large Horizontal Automatically Oiled Hook
- Needle Frame Stabilizer
- Barrel-type Slip Bearing Safety Clutch
- High Needle Bar Stroke
- High Presser Foot Lift
- Quick Release Knee Presser Pedal
- Easy dial-adjustable stitch regulator
- Reverse
- Large Side-Loaded Bobbin
- Built-In Bobbin Winder
- Built-In Synchronizer Hub
- Improved feeding motion for all thicknesses of materials without gathering
- Hanged Face Plate
- Adjustable Climbing Device
- Lower thread guide with tension
- Large Hand Wheel
- Adjustable Take-Up Guide for thread loop timing




P1255RB-1 SINGLE NEEDLE

Drop Feed, Needle Feed, Walking Foot, Lockstitch Machines

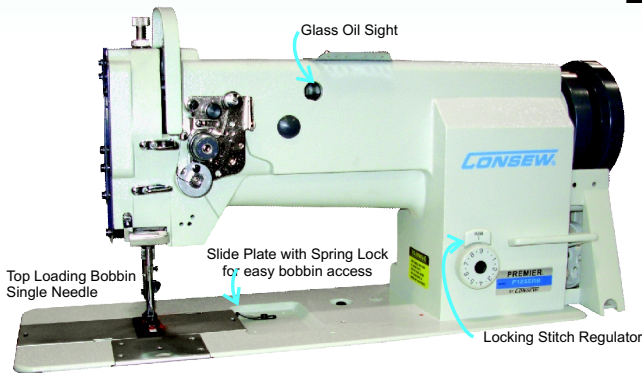

- Large Vertical Axis Automatically Oiled Hook
- Oil Pump System with Adjustable Oil Flow
- Upper Oil Glass Sight
- Barrel-type, Locking Stitch Regulator
- Reverse
- Safety Clutch
- Large Top-Loaded Bobbin
- Locking Slide Plate for easy bobbin access.
- Adjustable Take-Up Thread Guide for thread loop timing
- Quick Tension Release


P2339RB-1 DOUBLE NEEDLE

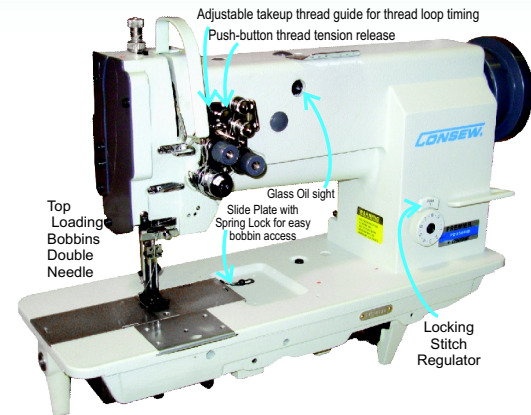

Presser Foot Lift: By Hand 5/16" (8 mm) By Knee 33/64" (13 mm)
Stitch Length, Max. 2.8 s.p.i. (9 mm)

P1255RBLH-18-1 SINGLE NEEDLE

Drop Feed, Needle Feed, Walking Foot, Lockstitch Machines

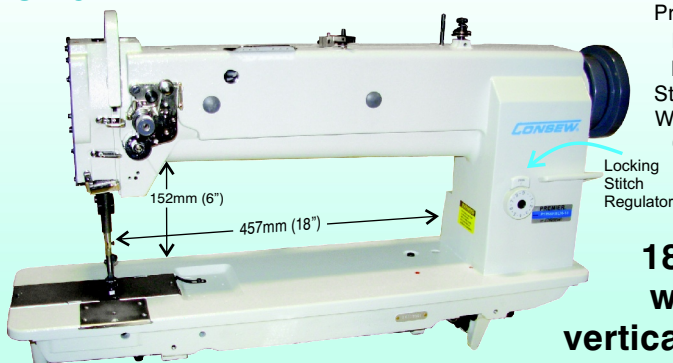

Presser Foot Lift:
By Hand 5/16" (8 mm)
By Knee 33/64" (13 mm)
Stitch Length, Max. 2.8 spi (9 mm)
Working Height Under Arm:
6" (152 mm) maximum

18" Long Arm with up to 6" vertical working space

P2339RBLH-18-1 DOUBLE NEEDLE

