P1510/60/65 STANDARD (PLAIN) MACHINES

WALKING FEET

Model P1510RB-series

Single Needle



P1510RB-14 • P1510RBL-18 • P1510RBL-25

Standard Version - Single Needle **Model** Wkspc P1510RB-14 14" P1510RBL-18 18" P1510RBL-25 25" 0







Model P1560RB-series Two Needle P1560RB-14 • P1560RBL-18 • P1560RBL-25

Standard Version - Two Needle Model Wkspc

P1560RB-14 14" P1560RBL-18 18"

P1560RBL-25 25"



WALKING

Model P1565RB-series Two Needle w Split Needle Bar

P1565RB-14 • P1565RBL-18 • P1565RBL-25

Standard Version - Two Needle Split Model Wkspc P1565RB-14 14" P1565RBL-18 18" P1565RBL-25 25"



Optional for the P1510RB, P1560RB & 1565RB series plain belt-driven machines.

Automatic Footlift Kit (complete) part# 285A1510 To be used with Consew motors CSM3002 or CSM4002

Back of P1510RB-14 showing the Footlift Air Lines and Air Cylinder.

Single solenoid setup includes...





285A1510

Single **Electric** Air Switch Solenoid Valve

Air Regulator with Dryer

Optional for the P1510RB, P1560RB & 1565RB series plain belt-driven machines.

Knuckle Switch for Reverse (ask for price) To be used with Consew motors CSM3003 or CSM4003

P1510/60/65 - DD - DIRECT DRIVE MACHINES

(-DD) Featuring

- Computer controlled
- **Automatic Functions**
- **Auto Foolift (Pneumatic)**
- Auto Reverse
- **Auto Needle Postion**
- Programmed Pattern Stitching
- **Stitch Counting**

Note: The only difference between these -DD's and the -7DD's on page 3 is that the -DD's DO NOT have built in thread trimmers.







Direct Drive internal Motor Speed, maximum: 2500 - 3000 spm Stitch Length; Max. 9mm Presser Foot Lift: By Hand: 9 mm By Knee: 16mm Lubrication: Semi-Automatic Adjustable Presser Feet Climbing Built in Bobbin Winder, Safety Clutch

The DD machines come with pneumatically (air) operated foot lift and needle position.

(They do not come with the compressor. You need to hook that system up to your factory's compressed air source. If you do not have a compressor at your facility, use Consew model 2206RB-14-7DD.)

P1510RB-14-DD/220 • P1510RBL-18-DD/220 • P1510RBL-25-DD/220 SINGLE NEEDLE

Direct Drive Single-Needle Machines (-DD) Workspace P1510RB-14-DD/220 14" P1510RBL-18-DD/220 18" P1510RBL-25-DD/220 25"

Currently Available in 220VAC Version ONLY.



*\$25 charge for single unit stand packing on regular sized stands, No fee on Long Arm Stands

Top Load Bobbin

P1510RBL-18-DD/220

P1560RB-14-DD/220 • P1560RBL-18-DD/220 • P1560RBL-25-DD/220 TWO NEEDLE

Direct Drive Only, 2-Needle, Machines (DD) Workspace Model P1560RB-14-DD/220 14" P1560RBL-18-DD/220 18" P1560RBL-25-DD/220 25"

Currently Available in 220VAC Version ONLY.





P1565RB-14-DD/220 • P1565RBL-18-DD/220 • P1565RBL-25-DD/220 TWO NEEDLE w SPLIT NEEDLE

Direct Drive Only, 2-Needle - Split (DD) Model **Workspace** P1565RB-14-DD/220 14" 18" P1565RBL-18-DD/220 25" P1565RBL-25-DD/220

Currently Available in 220VAC Version ONLY.



WALKING FOOT Double Needle Split Needle Bar ANGULAR STITCHING



P1510/60/65 - 7DD - DIRECT DRIVE MACHINES

(-7DD) FULL AUTO FUNCTIONS, Featuring:

- Auto Thread Trimming
- Computer Controlled
- Automatic Functions

- Auto Foolift (Pneumatic)
- Auto Reverse
- Auto Needle Postion
- Programmed Pattern Stitching
- Stitch Counting

ALL THE SAME FUNCTIONS AS -DD MACHINES WITH AUTO TRIMMING ADDED



WITH AUTO RIVE **THREAD TRIM**

Direct Drive internal Motor Speed, maximum: 2500 - 3000 spm Stitch Length: Max. 9mm Presser Foot Lift: By Hand- 9 mm By Knee- 16mm Lubrication: Semi-Automatic Adjustable Presser Feet Climbing

Built in Bobbin Winder • Safety Clutch

The 7DD machines come with pneumatically (air) operated foot lift and needle position.

(They do not come with the compressor. You need to hook that system up to your factories compressed air source. If you do not have a compressor at your facility, use Consew model 2206RB-14-7DD.)

P1510RB-14-7DD/220 • P1510RBL-18-7DD/220 • P1510RBL-25-7DD/220 SINGLE NEEDLE

Full Auto Function, Single Needle (-7DD) Workspace P1510RB-14-7DD/220 14" P1510RBL-18-7DD/220 18" P1510RBL-25-7DD/220 25"

Currently Available in 220VAC Version ONLY.





P1560RB-14-7DD/220 • P1560RBL-18-7DD/220 • P1560RBL-25-7DD/220 TWO NEEDLE

Full Automatic Function Two-Needle (7DD) Workspace Model P1560RB-14-7DD/220 P1560RBL-18-7DD/220 18" P1560RBL-25-7DD/220 25"

Currently Available in 220VAC Version ONLY.





P1565RB-14-7DD/220 • P1565RBL-18-7DD/220 • P1565RBL-25-7DD/220 TWO NEEDLE w SPLIT NEEDLE

Full Auto Function, Two Needle - Split (-7DD) Model Workspace P1565RB-14-7DD/220 14" P1565RBL-18-7DD/220 18" P1565RBL-25-7DD/220 25"

Currently Available in 220VAC Version ONLY.







P1565RBL-25-7DD/220



CONSOLIDATED SEWING MACHINE CORP.
INDUSTRIAL SEWING & CUTTING EQUIPMENT
web: www.consew.com

THE QUALITY GOES IN BEFORE THE NAME GOES ON

June, 2023

©2023 Consew USA -0623

P1510/60/65 SERIES

Heavy-Duty machines
designed for
automotive, marine, leather,
canvas and
general upholstery.

DIRECT DRIVE

and Standard (plain) Machines

Model 2206RB-14-7-DD







DIRECT DRIVE MACHINE with •Triple Feed: Drop Feed, Needle Feed and Alternating (walking) Presser Feet •Semi-Automatic Lubrication System •Reverse

• FULL AUTOMATIC FUNCTIONS with Display

Manual & Automatic Reverse with Knuckle Switch

Large Bobbin And Horizontal Axis Hook (side load)


Role-In, tucks the top thread under fabric when it starts









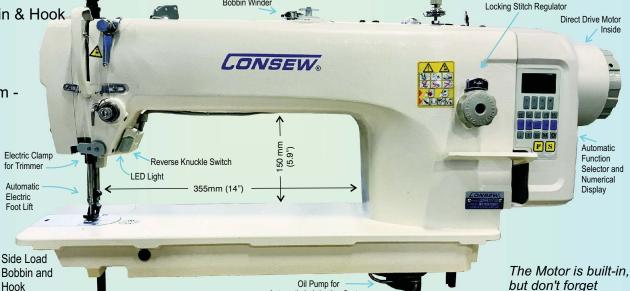

Automatic Lubrication System

Some of the models may vary from the picture as to color, shape, location of controls, due to manufacturing changes, but the features will be the same or more.

the Stand & Table!