



JTR-LH3578/PTA Series

Jeans Front Pocket Tape Sewing Unit



TIMESAIVING			
TIME MANUAL METHOD	TIME AUTOMATED METHOD	TIMESAIVING PERCENT	
16_{SEC}	8_{SEC}	50%	
ADDITIONAL BENEFITS			
HIGH EFFICIENCY	STANDARD QUALITY	CONSISTENCY	SPEED
✓	✓	✓	✓



Highlights

- Double needle head
- Large hook
- Special attachment for jeans pocket pouch with tape attaching
- Photocell controlled tape cutting unit
- Automatic presser foot lifter
- WFS waste suction system (optional)

TECHNICAL SPECIFICATION


Machine Head (Standard)	LH3578A
Motor	Servo Motor
Max. Sewing Speed	3.000 rpm
Capacity	4.000 - 4.500 pcs / 9 hours
Daily Piece Counter	Available
Needle Gauge (Standard)	6.4 mm
Pocket Tape Attaching Size (Standard)	10 mm
Min. - Max. Stitch Length	2.5 mm - 4 mm
Needle Type	GB / DPX5 #18
Power Requirement / Power Consumption	Single-phase 220V - 240V / 520VA
Compressed Air / Air Consumption	6 Bar / 3L/min.

JTR-LH3578/PTA Series

Jeans Front Pocket Tape Sewing Unit

WHEN YOU PLACE ORDERS

Please note when placing orders, that the model name should be written as follows.

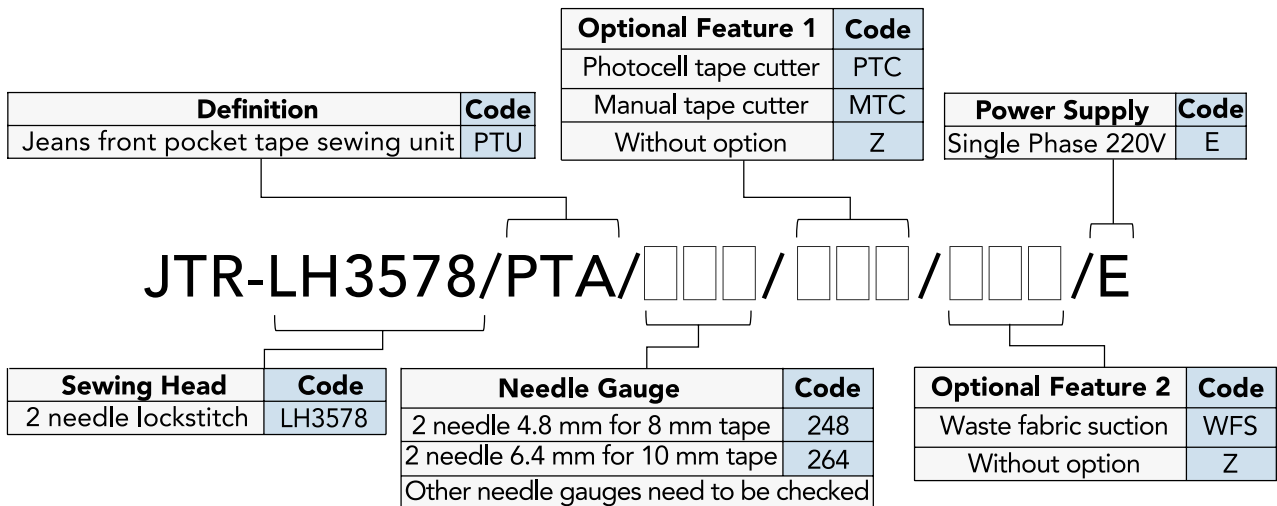

SHIPMENT DETAILS	
Machine net weight	82 kg
Machine gross weight (Including palette and package)	135 kg
Machine net dimensions:	
Width	60 cm
Length	110 cm
Height	140 cm
Package dimensions:	
Width	70 cm
Length	120 cm
Height	160 cm
HS code	8452.29.00.00.19



JUKI
JUKI CORPORATION
 SEWING MACHINERY & SYSTEMS BUSINESS UNIT

2-11-1, TSURUMAKI, TAMA-SHI,
 TOKYO 206-8551, JAPAN
 PHONE: (81) 42-357-2370
 FAX: (81) 42-357-2274
<https://www.juki.co.jp/en>

* Specifications and appearance are subject to change without prior notice for improvement.
 * Read the instruction manual before putting the machine into service to ensure safety.
 * This catalogue prints with environment-friendly soyink on recycle paper.
 * Paper from responsible sources FSC™ C001712