


# JTR-MS1190/TA-STS Series

## High-Speed Feed of the Arm Shoulder to Shoulder Tape Attaching Unit



TIMESAVING			
TIME MANUEL METHOD	TIME AUTOMATED METHOD	TIMESAVING PERCENT	
<b>35</b> SEC	<b>12</b> SEC	<b>65</b> %	
ADDITIONAL BENEFITS			
HIGH EFFICIENCY	STANDARD QUALITY	CONSISTENCY	SPEED
✓	✓	✓	✓

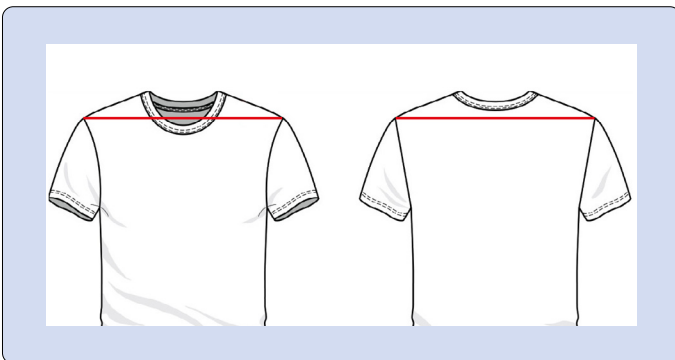

### Highlights

- Self lubrication oiling system
- Special presser foot with guide
- Pneumatic presser foot
- Photocell controlled cutting unit
- Needle cooling unit
- Adjustable table and stand

### TECHNICAL SPECIFICATION


Machine Head	MS-1190
Motor	Hohsing Direct Drive Motor
Max. Sewing Speed	5.000 rpm
Capacity	2.700 - 3.000 pcs / 9 hours
Daily Piece Counter	Available
Min. - Max. Stitch Length	2.5 mm - 4 mm
Needle Type	GB / UY128 #12 - 14
Power Requirement / Power Consumption	Single-phase 220V - 240V 50Hz / 480VA
Compressed Air / Air Consumption	6 Bar / 6L/min.

# JTR-MS1190/TA-STS Series


## High-Speed Feed of the Arm Shoulder to Shoulder Tape Attaching Unit

### WHEN YOU PLACE ORDERS

Please note when placing orders, that the model name should be written as follows.

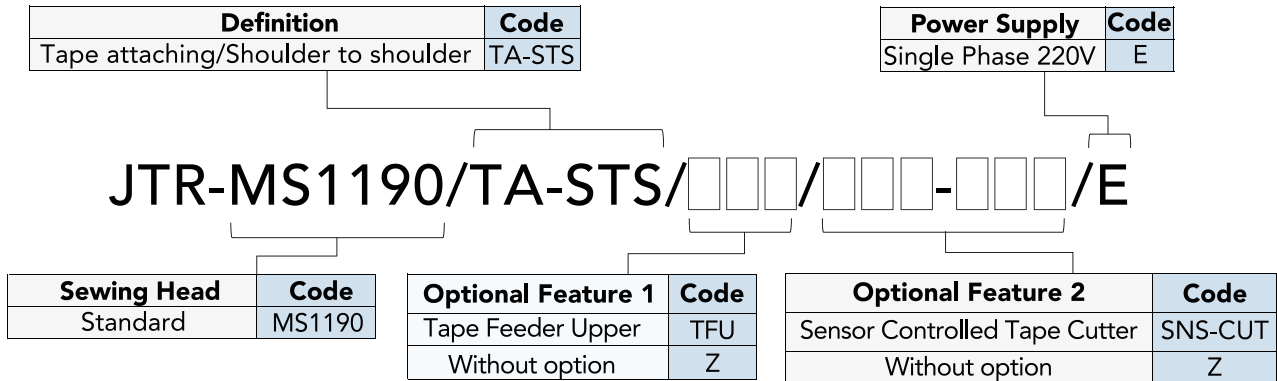

SHIPMENT DETAILS	
Machine net weight	98 kg
Machine gross weight (Including palette and package)	140 kg
Machine net dimensions:	
Width	70 cm
Length	100 cm
Height	130 cm
Package dimensions:	
Width	80 cm
Length	110 cm
Height	150 cm
HS code	8452.29.00.00.19

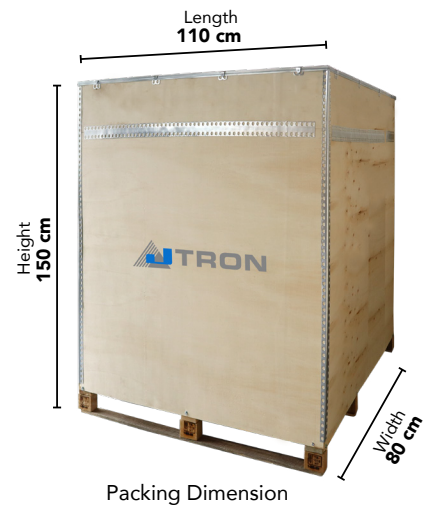

**JUKI**  
**JUKI CORPORATION**  
 SEWING MACHINERY & SYSTEMS BUSINESS UNIT

2-11-1, TSURUMAKI, TAMA-SHI,  
 TOKYO 206-8551, JAPAN  
 PHONE: (81) 42-357-2370  
 FAX: (81) 42-357-2274  
<https://www.juki.co.jp/en>

\* Specifications and appearance are subject to change without prior notice for improvement.  
 \* Read the instruction manual before putting the machine into service to ensure safety.  
 \* This catalogue prints with environment-friendly soyink on recycle paper.  
 \* Paper from responsible sources FSC™ C001712