

Highlights

- Able to attach up to 5 ribbon care labels Able to prepare5 different length and width of labels in one bundle
- Min. max. label length: 30 mm 180 mm Min. max. label width: 10 mm 50 mm
 Automatic feeding system for roll label
- Chopper type cutting system Label control sensor Excellent bartacking and lockstitch quality ■ Oil-free working environment (oil-free head) ■ Automatic thread tension system (patented)
- Automatic thread trimmer and wiper Automatic hook thread clamp Cutting post transport system Step motor driven gradually adjustable presser foot height Able to share settings between machines thanks to NFC and USB


TECHNICAL SPECIFICATION	
Machine Head (Standard)	LK-1900BN
Motor	IPM550W Motor
Max. Sewing Speed	3.200 rpm
Capacity	5.000 - 6.000 pcs / 9 hours
Daily Piece Counter	Available
Min Max. Label Length	30 mm - 180 mm
Min Max. Label Width	10 mm - 50 mm
Min Max. Stitch Length	2 mm - 3.5 mm
Needle Type	GB / DPX17 #12-14
Power Requirement / Power Consumption	Single phase 220V - 240V 50 Hz / 270VA
Compressed Air / Air Consumption	6 Bar - 3.5 L/min.

JTR-LK1900BN/CLA Series

Care Labels Combining and Sewing Automat

WHEN YOU PLACE ORDERS

Please note when placing orders, that the model name should be written as follows.

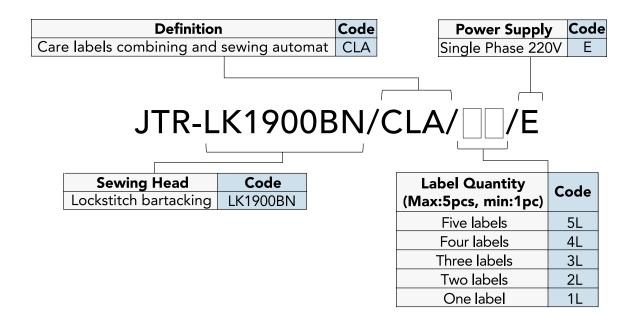

SHIPMENT DETAILS	
Machine net weight	179 kg
Machine gross weight	214 kg
(Including palette and package)	314 kg
Machine net dimensions:	
Width	110 cm
Length	120 cm
Height	190 cm
Package dimensions:	
Width	120 cm
Length	130 cm
Height	210 cm
HS code	8452.29.00.00.19





2-11-1, TSURUMAKI, TAMA-SHI, TOKYO 206-8551, JAPAN PHONE: (81) 42-357-2370 FAX: (81) 42-357-2274 https://www.juki.co.jp/en

 $\begin{tabular}{ll} * Specifications and appearance are subject to change without prior notice for improvement. \end{tabular}$

* Read the instruction manual before putting the machine into service to ensure safety.

* This catalogue prints with environment-friendly soyink on recycle paper.

Reper from responsible sources
 FSC™ C001712

