

# JTR-LH3578/PHA Series


## Lockstitch Pocket Hemming Automat



TIMESAVING		
TIME MANUEL METHOD	TIME AUTOMATED METHOD	TIMESAVING PERCENT
12 <sup>SEC</sup>	3.2 <sup>SEC</sup>	74%

ADDITIONAL BENEFITS			
HIGH EFFICIENCY	STANDARD QUALITY	CONSISTENCY	SPEED
✓	✓	✓	✓

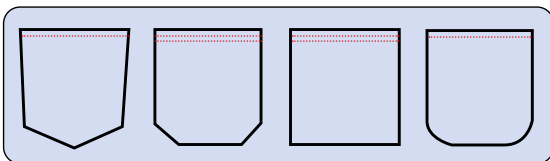

### Highlights

- Excellent lockstitch quality
- Operator friendly LCD touchscreen
- Step motor controlled special belt transport system adjustable for fine or thick material
- Photocell controlled thread trimming system
- Two needle lockstitch sewing head with standard 6,4 mm gauge
- Optionally, needle gauge can be chosen as: 4,8; 7,2 mm
- Special rotating stacker system
- Height adjustable work place


TECHNICAL SPECIFICATION	
Machine Head (Standard)	LH-3578AGF
Motor	Efka DC1500 Servo Motor
Max. Sewing Speed	2.300 rpm
Capacity	9.000 - 10.000 pcs / 9 hrs
Daily Piece Counter	Available
Thread Breakage Detection	Available
Min. - Max. Hemming Size	9 mm - 15 mm (optional wide gauge: 15 mm - 25 mm)
Max. Stitch Length	3 mm
Needle Type	GB / DPX5 #21
Power Requirement / Power Consumption	Single-phase 220V - 240V / 550VA
Compressed Air / Air Consumption	6 Bar / 10L/min.

# JTR-LH3578/PHA Series

## Lockstitch Pocket Hemming Automat

### WHEN YOU PLACE ORDERS

Please note when placing orders, that the model name should be written as follows.

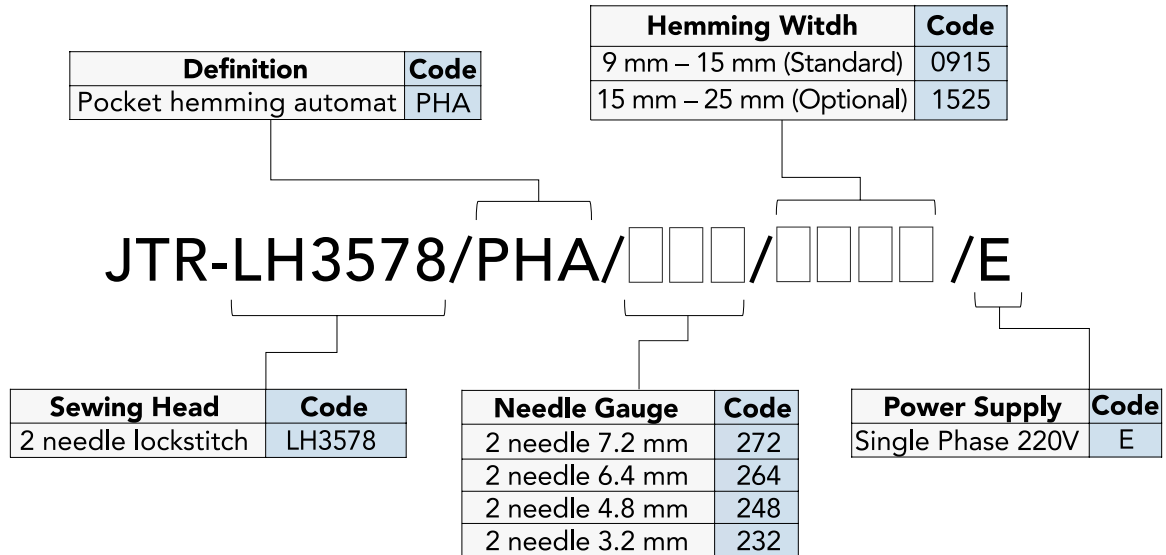

SHIPMENT DETAILS	
Machine net weight	170 kg
Machine gross weight (Including palette and package)	230 kg
Machine net dimensions:	
Width	100 cm
Length	165 cm
Height	140 cm
Package dimensions:	
Width	110 cm
Length	180 cm
Height	160 cm
HS code	8452.21.00.00.00



**JUKI**  
**JUKI CORPORATION**  
 SEWING MACHINERY & SYSTEMS BUSINESS UNIT

2-11-1, TSURUMAKI, TAMA-SHI,  
 TOKYO 206-8551, JAPAN  
 PHONE: (81) 42-357-2370  
 FAX: (81) 42-357-2274  
<https://www.juki.co.jp/en>

\* Specifications and appearance are subject to change without prior notice for improvement.  
 \* Read the instruction manual before putting the machine into service to ensure safety.  
 \* This catalogue prints with environment-friendly soyink on recycle paper.  
 \* Paper from responsible sources FSC™ C001712