

JTR-DLU5490/SHU

Shirt Bottom Hemming Sewing Unit





Highlights

- Perfect seam quality due to top and bottom feed system
- Ergonomic design workstation for easy handling
- Special air type attachment for bottom hemming (4-5-6-7 mm hemming width options)
- Automatic thread trimmer and wiper
- Automatic presser foot lifter
- Back-tack function at the beginning and at the end


TECHNICAL SPECIFICATION	
Machine Head (Standard)	DLU-5490N-7
Motor	M-92 Motor
Max. Sewing Speed	5.000 rpm
Capacity	2.700 - 3.000 pcs / 9 hours
Min Max. Stitch Length	1.5 mm - 3.5 mm
Hemming Width	6 mm (4 - 5 - 7 mm optional)
Needle Type	GB / DPX5 #12
Power Requirement / Power Consumption	Single-phase 220V - 240V 50 Hz / 140VA
Compressed Air / Air Consumption	6 Bar / 1.5 L/min.

JTR-DLU5490/SHU

Shirt Bottom Hemming Sewing Unit

WHEN YOU PLACE ORDERS

Please note when placing orders, that the model name should be written as follows.

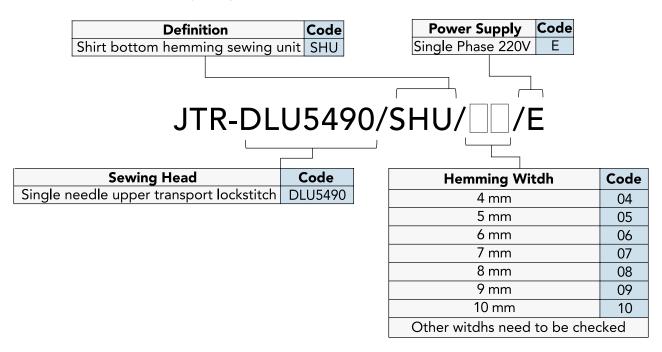

SHIPMENT DETAILS		
Machine net weight	92 kg	
Machine gross weight	12F lan	
(Including palette and package)	135 kg	
Machine net dimensions:		
Width	70 cm	
Length	145 cm	
Height	125 cm	
Package dimensions:		
Width	85 cm	
Length	155 cm	
Height	145 cm	
HS code	8452.29.00.00.19	





2-11-1, TSURUMAKI, TAMA-SHI, TOKYO 206-8551, JAPAN PHONE: (81) 42-357-2370 FAX: (81) 42-357-2274 https://www.juki.co.jp/en

 $\begin{tabular}{ll} * Specifications and appearance are subject to change without prior notice for improvement. \end{tabular}$

* Read the instruction manual before putting the machine into service to ensure safety.

* This catalogue prints with environment-friendly soyink on recycle paper.

≯ Paper from responsible sources FSC™ C001712

