


JTR-MF7523/PHA Series

Chainstitch Pocket Hemming Automat



TIMESAVING			
TIME MANUEL METHOD	TIME AUTOMATED METHOD	TIMESAVING PERCENT	
12SEC	1.6SEC	87%	
ADDITIONAL BENEFITS			
HIGH EFFICIENCY	STANDARD QUALITY	CONSISTENCY	SPEED
✓	✓	✓	✓

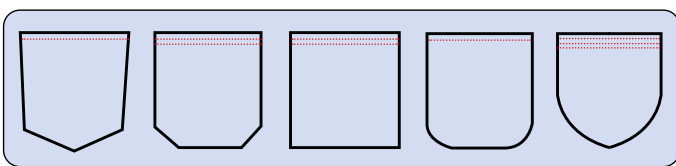

Highlights

- Excellent chainstitch quality
- Operator friendly LCD touchscreen
- Special hemming attachment provides 9 to 15 mm hemming margin
- Step motor controlled special belt transport system adjustable for fine or thick material
- Photocell controlled thread trimming system
- Three needle chainstitch sewing head with standard 6.4 mm gauge
- Optionally, needle gauge can be chosen as: 4.8; 7.2 mm
- Special rotating stacker system for the sewn pockets
- Height adjustable work place
- Wide folder attachment between 15 - 25 mm (optional)

TECHNICAL SPECIFICATION	
Machine Head	MF7523C11
Motor	Direct Drive Motor
Max. Sewing Speed	3.000 rpm
Capacity	15.000 - 18.000 pcs / 9 hours
Daily Piece Counter	Available
Thread Breakage Detection	Available
Hemming Size	9 mm - 15 mm
Max. Stitch Length	3 mm - 4.5 mm
Needle Type	GB / UY128 #19
Power Requirement / Power Consumption	Single-phase 220V - 240V 50 Hz / 550VA
Compressed Air / Air Consumption	6 Bar - 11 L / min.

